

MM

DE-MOUNT SPRAYERS

"GS" LINE

GS LINE

SUITABLE FOR:

- ✓ **SPRAYING**
- ✓ **WEEDING**
- ✓ **IRRIGATION AND WATER TRANSFER**
- ✓ **CLEANING AND DISINFECTION**
- ✓ **FIREFIGHTING**



MM

WWW.MMSPRAY.IT

DE-MOUNT SPRAYERS GS LINE



MACHINE CONCEIVED FOR MULTIPLE WORKING FUNCTIONS:

- Application of products for phytosanitary protection and weed control, both in agricultural and urban fields
- Cleaning and disinfection
- Irrigation and water transfer
- Firefighting.

Thanks to their versatility, it is possible to connect various accessories including different types of spraying lances or hose reels, depending on the pump chosen.





SYSTEM WASHING TANK

12V PUMP

THE MACHINE COMES STANDARD WITH hand-washing tank, (standard on spraying and weeding versions), it can be used in case of emergency when the operator accidentally comes into contact with chemicals (*in accordance with the latest safety standards*). The **system washing tank** (*optional, mandatory for professional use*) allows the complete rinsing of all the spraying system.

MAIN FEATURES

- ☑ Reinforced painted steel frame, resistant to wear.
- ☑ **Polyethylene tanks.**
- ☑ Clearly visible and easy-to-read external graduated level.
- ☑ Filter with shut-off valve. Filter maintenance at any time during treatment, even when the tank is full.
- ☑ External valve for **tank emptying**: easy and immediate drainage of tank contents; no contact with the chemical.
- ☑ Possibility to choose 12V, diaphragm, piston and self-priming pumps with electric, internal combustion or hydraulic engines.
- ☑ Possibility to fit various types of hose reels and lances.
- ☑ **Excellent quality/price ratio, among the best in its category.**
- ☑ They can be unloaded with either a forklift or a crane.
- ☑ Machines built in compliance with all current regulations.

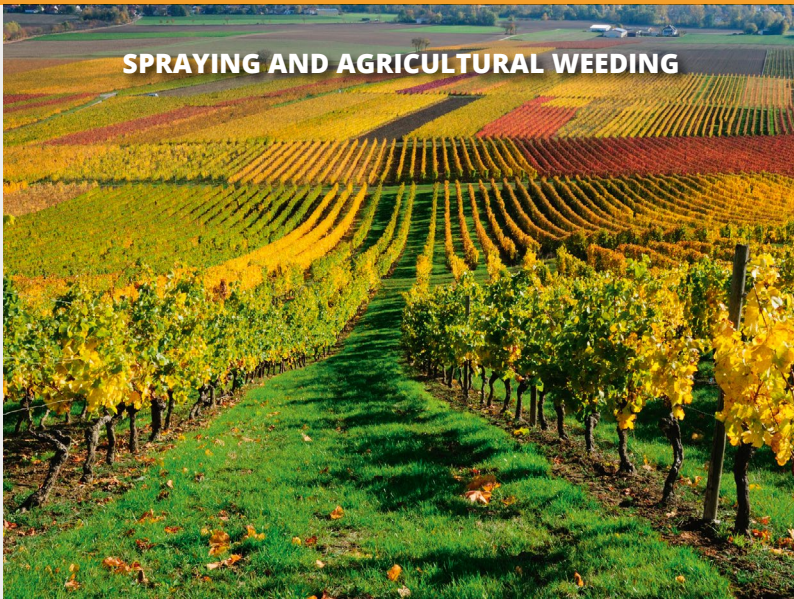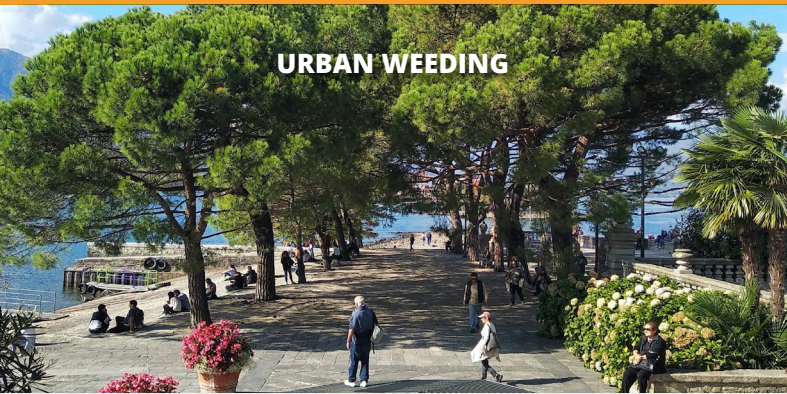

GS 200 L
for Minitransporter



GS 300-500 L



GS 1000 L



PRODOTTO
100%
MADE IN ITALY

DE-MOUNT SPRAYERS GS LINE

Standard technical features

- Painted tubular steel frame with self-supporting structure designed for mounting on platforms or skips, with handles
- Polyethylene tank from 200 to 2000 litres
- Emptying tap
- Hand-washing tank
- Suction filter with valve
- Possibility of fitting 1 or 2 hose reels (except for 200 L)
- Possibility of mounting 12V or 230 V electric pumps, diaphragms, pistons or self-priming pumps



Indicative picture.
Mini-transporter and hose reel are not included.

PLATFORM DIMENSIONS

DE-MOUNT SPRAYER	PLATFORM MIN. DIM. (cm)	DE-MOUNT SPRAYER	PLATFORM MIN. DIM. (cm)
200 L	50x100x75 (base 50x80)	1000 L	102x210x160
300 L	90x130x120	1500 L	130x245x165
500 L	90x130x127	2000 L	145x255x165




FILTER WITH VALVE



200L DE-MOUNT SPRAYER WITH 12V PUMP AND AUTONOMOUS BATTERY



PISTON PUMP FOR HIGH-PRESSURE WASHING AND 230 V ENGINE

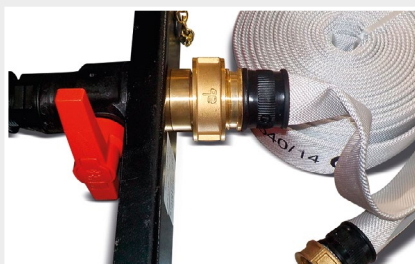

KIT-AIB FIRE-FIGHTING VERSION
(EXCEPT FOR 200 L VERSION)



ENGINE AND SELF-PRIMING PUMP UNIT FOR IRRIGATION AND WATER TRANSFER



UNIT WITH DIAPHRAGM PUMP AND INTERNAL COMBUSTION ENGINE FOR SPRAYING AND WEED CONTROL



M.M. S.r.l.
Via R. Dalla Costa, 110
41122 Modena - ITALY
Tel. +39 059 25 16 54
Fax +39 059 25 17 11
mm@mmspray.it



www.mmspray.it